RevNo		Date	Signature	Checked
1	Increase 0.64±0.05	2013.0704	SHC	

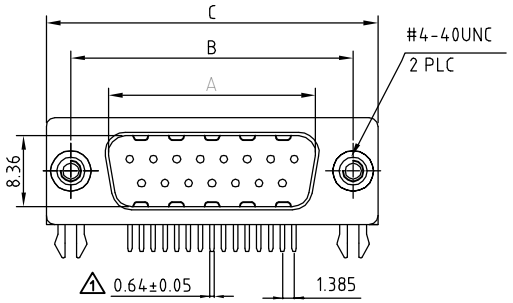



Rohs Compliance
2002\95\EC

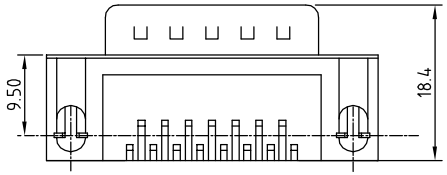

Note:

No.	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

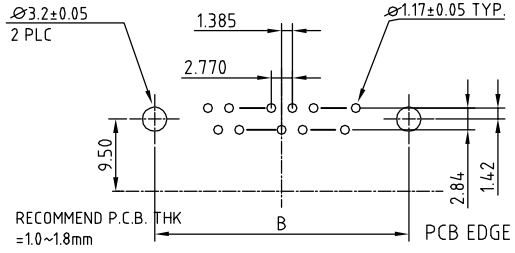









103XXMXXX - - - - -LF

- D-Sub 90D Typ: 09, 15, 25, 37
- Male
- Plating: 8.Nickel, 9.Tin, 11.Gold
- Contact Plating: 1.White, 3 Black, 4.Yellow, 6 Green, 9 Blue, 10. PC99
- Contact Plating: 1 Full Gold, 2 Half Gold
- Vacant :Default 1u', 3. 3u', 5. 5u', 6. 10u', 7. 15u', 8 30u'
- Vacant::No Accessories, V0.Coalescent Nut H=5.8, V. Lock Screw., VI. With Screw., VII.Additional Screw.
- Vacant:No Screw, S:4.8, L:5.8
- Vacant:Default PBT, P2:PA6T, P3:LCP, P4:PA9T

ELECTRICAL CHARACTERISTICS

Contact Current Rating:3Amperes.
Dielectric Withstanding Voltage:AC 500V at sea level.
Insulation Resistance:1000Megohms Min.
Contact Resistance:30Milliohms Max.
Operation Temperature : -55°C to +105°C.

Meterial

Contact :Copper Alloy.
Insulator:PBT. (Select PA6T /LCP /PA9T)
Shell: SPCC.
Z-Piece: Fe.
Screw: Copper Alloy.
Rivet: Copper Alloy. or Zinc.

DRAW.BY	LinHaiFong	DATE	2005-10-10	UNIT	MM	TOLERANCE UNSPECIFIED	.X ±0.30 Ang. ±2° .XX ±0.25 .XXX ±0.150	Chin Shong Enterprise CO., LTD.	ITEM: D-SUB Male 90D-DIP /7.2
APPVL.BY		VERSION	A	SCALE		DWG.No.	F:/XX/ / +		PART No.
									CUSTOMER